


CURRENT IN AMPERES

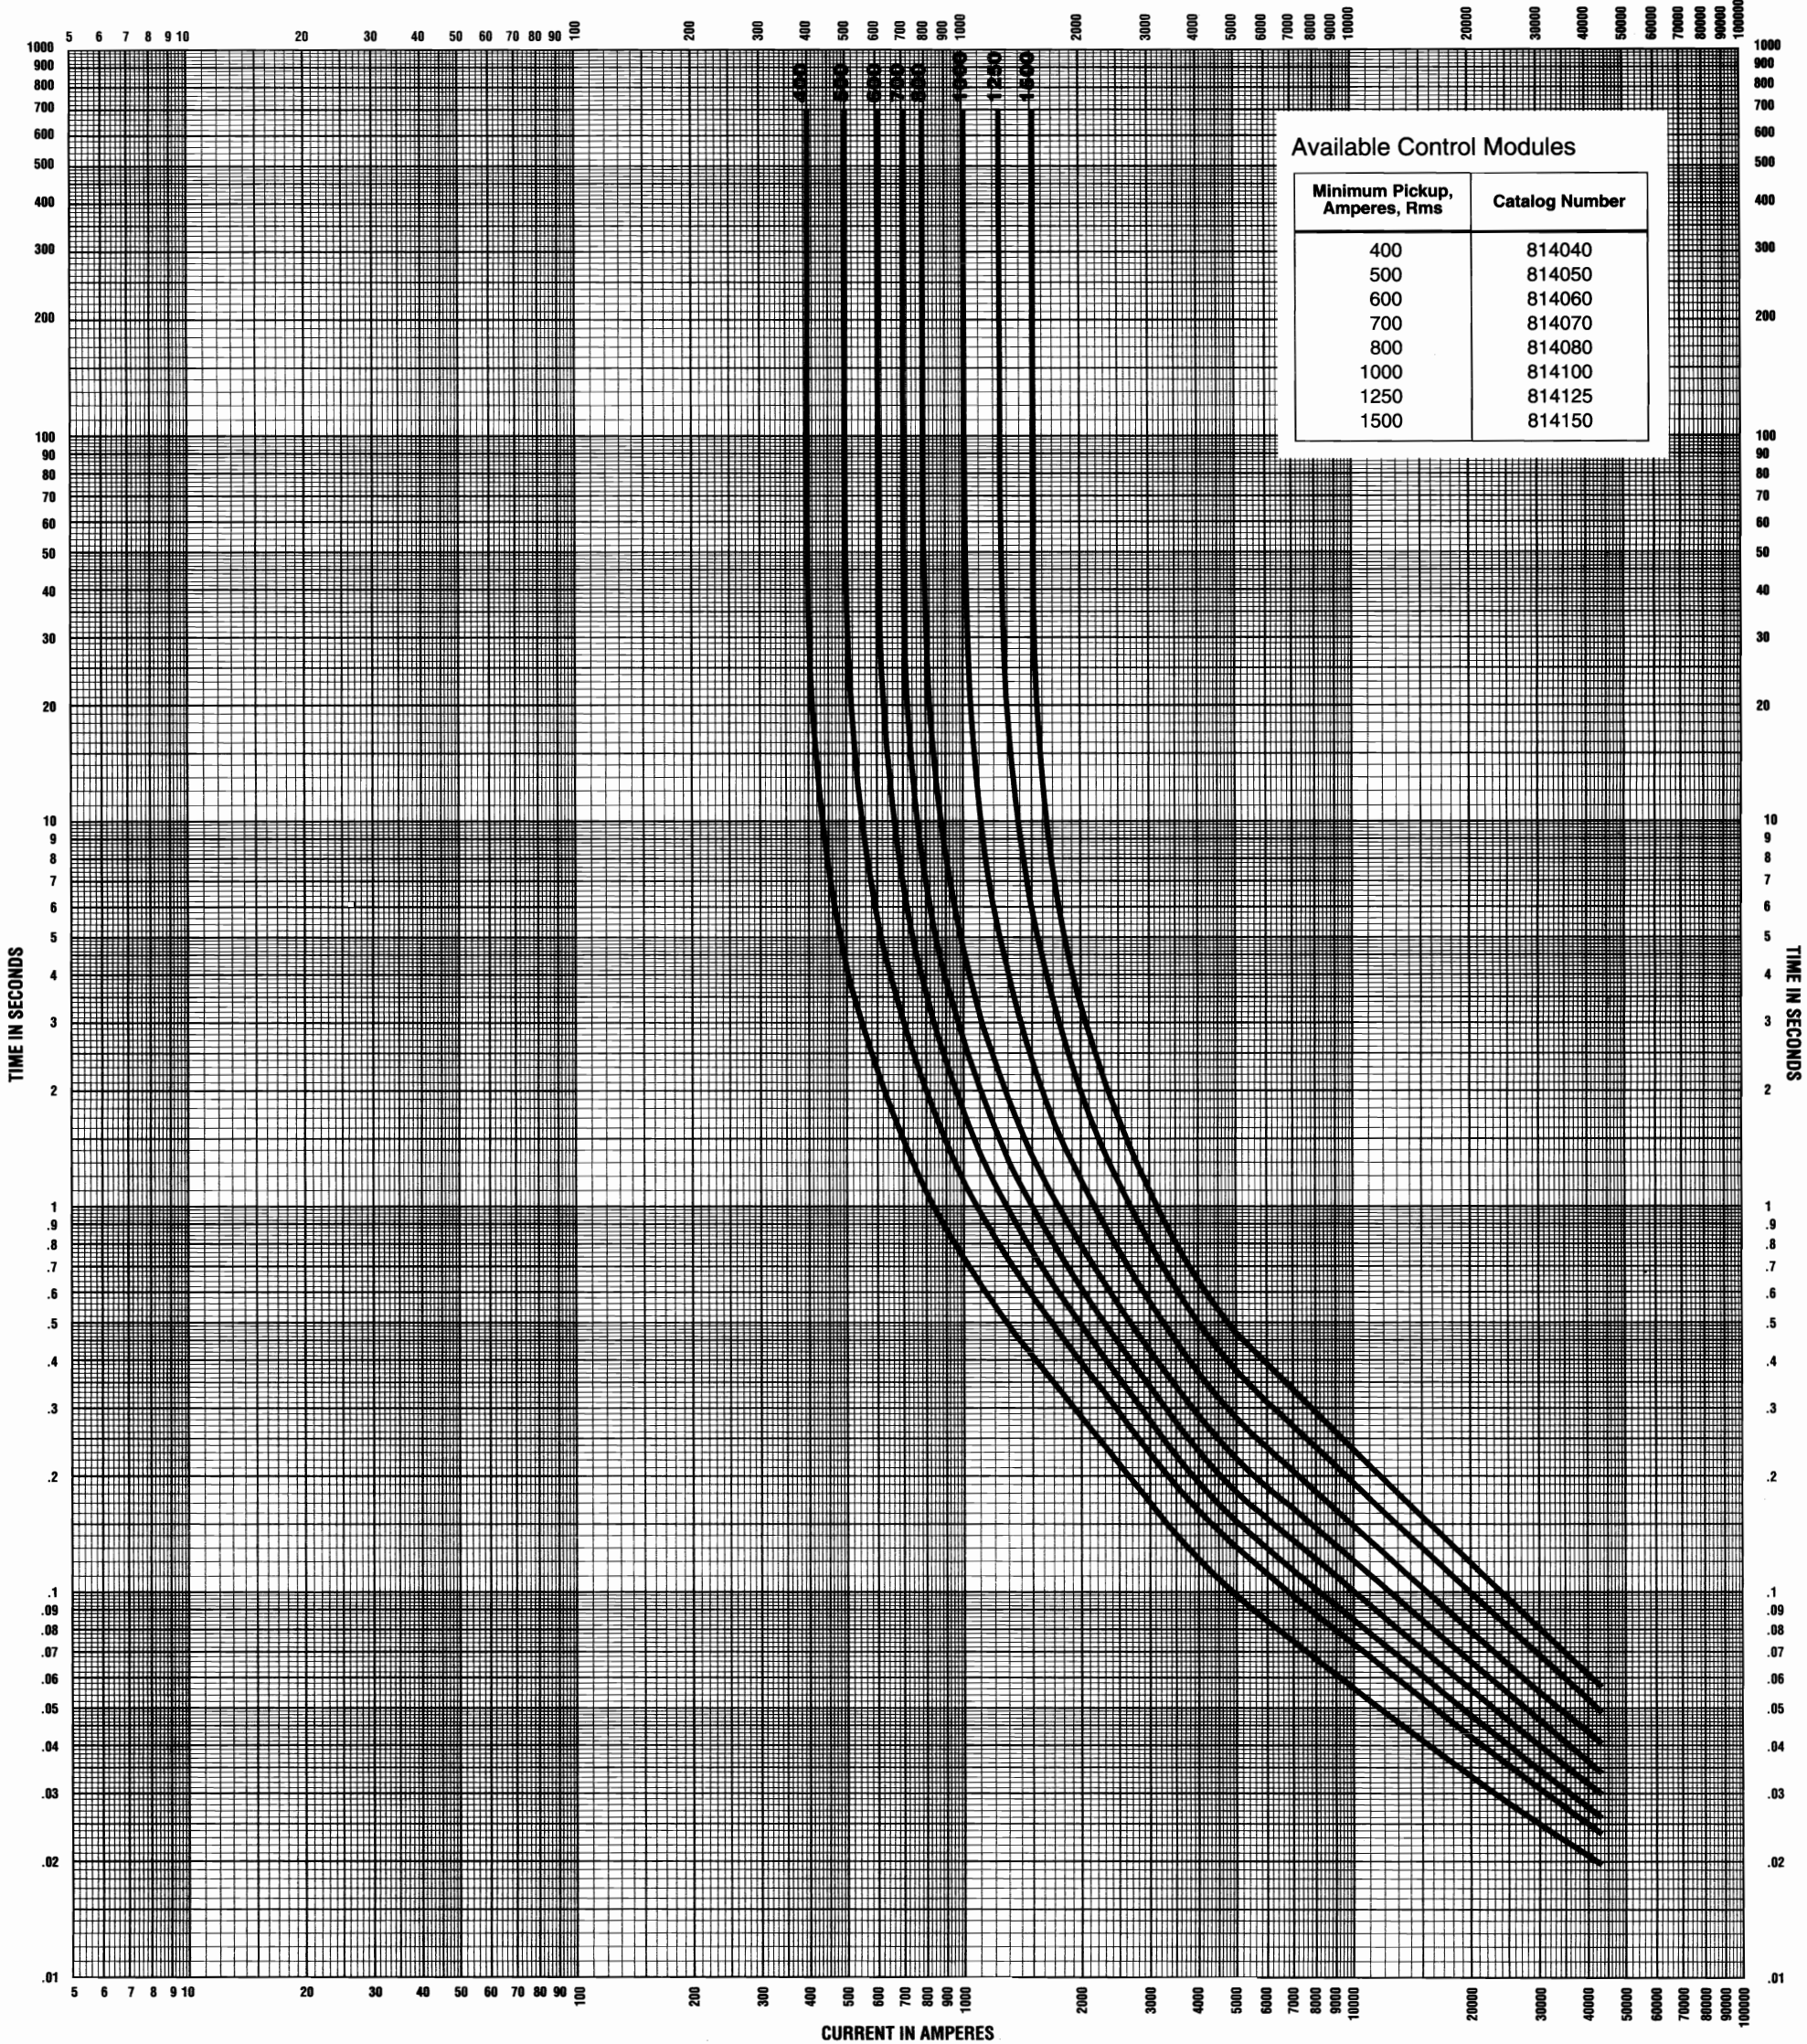

MINIMUM TRIPPING TIME-CURRENT CHARACTERISTIC CURVES

SINGLE FAULT FITER® ELECTRONIC POWER FUSES INVERSE-CURVE-TYPE CONTROL MODULES

BASIS—The minimum tripping time-current characteristic curves shown above are applicable over the entire Fault Fiter Electronic Power Fuse operating temperature range of -40°C to +55°C. No adjustments need be made to these curves for ambient temperatures within this temperature range, or to reflect self-heating due to the flow of load current.

TOLERANCES—Curves are plotted to minimum test points; maximum variations expressed in current values are plus 10%.

APPLICATION—The maximum continuous current-carrying capability of S&C Fault Fiter Electronic Power Fuses is 600 amperes rms, regardless of the control module selected.

Since Fault Fiter time-current characteristics are electronically derived, they are not subject to change due to aging, transient over-currents, or fault currents. It is, therefore, unnecessary to replace Fault Fiter Control Modules following a fault-clearing operation—only blown Fault Fiter Interrupting Modules need be replaced.

IMPORTANT—S&C Fault Fiter Electronic Power Fuse Control Modules must be selected by qualified persons who are knowledgeable in the subjects of equipment protection and time-current coordination, and who understand the consequences of improperly coordinated overcurrent protective devices. Failure to achieve complete coordination between Fault Fiter Electronic Power Fuses and source-side or load-side protective devices may result in improper operation of one or more Fault Fiter Fuses.